


## SLUSH MACHINE



### FEATURES

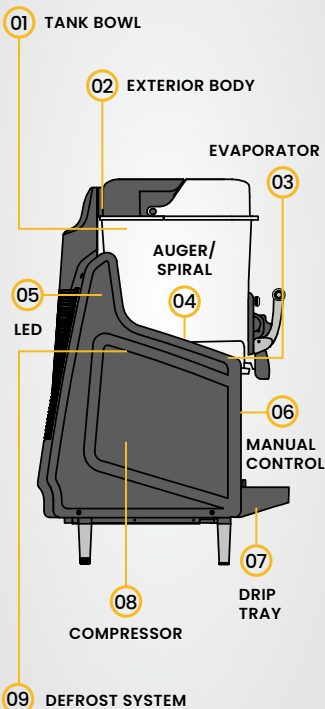

01

#### BPA FREE & REMOVABLE TANK



Built with a BPA-free, food-grade, and removable polycarbonate tank bowl for reliable use and hassle-free maintenance.

02

#### ABS EXTERIOR BODY



Constructed with an ABS plastic exterior body, known for its durability, impact resistance, and excellent electrical insulation.

03

#### STAINLESS STEEL EVAPORATORS



Engineered with grade 304 stainless steel evaporators for reliable and efficient cooling.

04

#### REDUCE SUGAR DEMAND



Designed to reduce sugar demand by up to 60% without compromising taste.

05

#### LED LIGHTING



Equipped with LED lighting to create an attractive product display.

06

#### PRECISE TEMPERATURE CONTROL



Installed with manual temperature controls, allowing individual temperature adjustment for each bowl.

07

#### EASY-TO-CLEAN DRIP TRAYS



Includes easy-to-clean stainless steel drip trays for added convenience.

08

#### LOW-NOISE OPERATION



Operates with a high-quality compressor that ensures low noise levels of less than 60dB.

09

#### HOT GAS DEFROST SYSTEM



Hot gas defrost system for the evaporator cylinder to prevent freezing and blockages in the auger/spiral.



## SPECIFICATIONS



**BMSM-1**



**BMSM-2**




**BMSM-3**

| Model                         | BMSM-1                   | BMSM-2                   | BMSM-3                   |
|-------------------------------|--------------------------|--------------------------|--------------------------|
| External Dimension WxDxH (mm) | 280x610x936              | 496x610x936              | 714x610x936              |
| Tank Quantity                 | 1                        | 2                        | 3                        |
| Capacity in Liters            | 12                       | 12x2                     | 12x3                     |
| Temperature Range (°C)        | -2~-12                   | -2~-12                   | -2~-12                   |
| Power (W)                     | 533                      | 870                      | 1120                     |
| Voltage (V)                   | 220~240                  | 220~240                  | 220~240                  |
| Frequency (Hz)                | 50                       | 50                       | 50                       |
| Current (A)                   | 3.06                     | 4.59                     | 5.4                      |
| Environment Temperature (°C)  | +5~+32                   | +5~+32                   | +5~+32                   |
| Refrigerant Type              | R404a                    | R404a                    | R404a                    |
| Refrigerant Amount (g)        | 180                      | 340                      | 415                      |
| Packing Dimensions WxDxH (mm) | 345x610x1050             | 560x610x1050             | 780x610x1050             |
| Net Weight (Kg)               | 35                       | 57                       | 78                       |
| Packing Weight (Kg)           | 46                       | 71                       | 95                       |
| Plug Requirement              | Type G<br>(British Plug) | Type G<br>(British Plug) | Type G<br>(British Plug) |
| Drain connection              | N/A                      | N/A                      | N/A                      |
| Water Connection              | N/A                      | N/A                      | N/A                      |




# SHOP DRAWING

BMSM-1

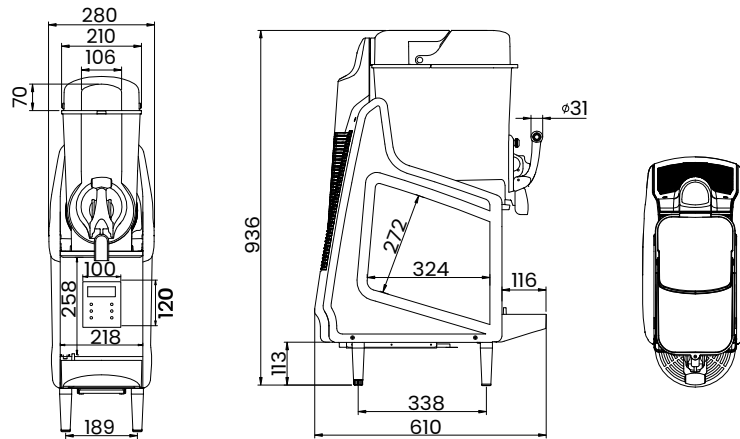

BMSM-2

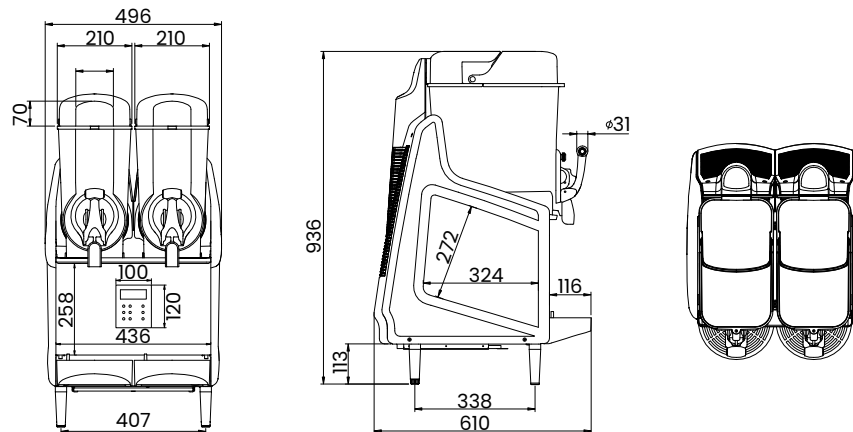

BMSM-3

